


## LTH-M001AU

### Vandal Intercom

DS-K88113-IME1(B)  
Vandal-Resistant Door Station

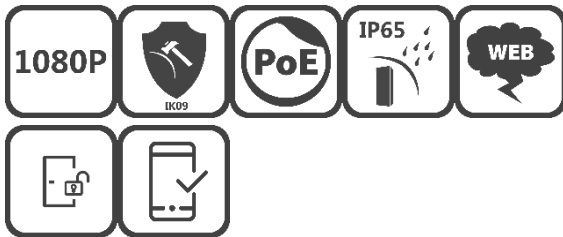

- 2MP HD Camera with IR supplement providing excellent image quality
- Supports standard POE power supply
- Supports mechanical doorbell, easier to call
- Receive calls, open the door and live view remotely via LTS Connect
- Supports web configuration
- Vandal & Water ingress: IK09 & IP65

## ▪ Specification

System parameters	
Operation system	Embedded Linux operation system
ROM	32 M
RAM	256 M
Processor	Embedded MCU Processor
Video parameters	
Lens	1
Resolution	Main stream : 1920 × 1080 Sub stream : 640 × 480
FOV	Horizontal:95° Vertical:54°
Wide dynamic range (WDR)	Support
Supplement light	IR supplement
Video compression standard	H.264
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U, G.711 A
Audio output	Built-in loudspeaker (More than 80 dB within 30 cm)
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Linked indoor station capacity	1
Sub door station capacity	16
Network parameters	
Network protocol	TCP/IP, RSTP, SIP
Device interfaces	
Alarm input	1
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
Lock control	1 relay, Max. to 30 VDC, 2 A)
General	
Button	1
Installation	Surface mounting

Weight	Net Weight: 0.795 kg Gross Weight: 0.992 kg
Protective level	IP65, IK09
Working temperature	-30 °C to 50 °C(-22 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	161.85 mm × 74.13 mm × 53.2 mm(6.37" × 2.92" × 2.09")
Power supply	12 VDC, IEEE802.3af, standard PoE
Application environment	Outdoor and Indoor
Power consumption	< 10 W
Language	English,French,Portuguese,Spanish,Russian,German,Italian,Polish,Arabic,Turkish,Vietnamese,Hungarian,Dutch,Romanian,Czech,Bulgarian,Ukrainian,Croatian,Serbian,Greek,Slovakia,BrazilianPortuguese

▪ **Dimension**

