

LXN7104-P4

Lite Series NVR

4-Channel, Single HDD NVR

with 4 PoE Ports



Key Features


- SMART H.264 / H.264+ / H.265 / H.265+ video Compression
- Up to 8 MP resolution recording
- 4 independent PoE network interfaces
- Independent HDMI (4K, 3840 × 2160) and VGA
- AI by Camera: Face detection, VCA, MD 2.0, license plate recognition
- Supports remote configuration and management of IP cameras, such as setting parameters, information retrieval, batch upgrading, and more
- Supports third-party network cameras
- P2P remote management with Pro-X app

Specifications


LXN7104-P4

Audio / Video	
IP Video Input	4 channels
Recording Resolutions	3, 4, 5, 6, 8 MP; 720, 1080p; CIF; VGA; D1
HDMI Output Resolutions	4K (3840 × 2160), 1920 × 1080, 1280 × 1024, 1280 × 720
VGA Output Resolutions	1920 × 1080, 1280 × 1024, 1280 × 720
Two-way Audio Input	1-ch, RCA
Audio Output	1-ch, RCA
Third-party Camera Access	ONVIF; RTSP
Decoding	
Decoding Formats	Smart Encoding; MJPEG; H.264; H.264H; H.264B; H.265
Live View / Playback Resolutions	3, 4, 5, 6, 8 MP; 720, 1080p; CIF; VGA; D1
Decoding Capacity	2 ch @ 8 MP / 8 ch @ 1080p
Synchronous Playback	1, 4 views
Intelligent Functions	
MD 2.0	4-ch, IMD by camera
VCA's	4-ch, line crossing by camera
Face Detection	4-ch, by camera
License Plate Recognition	4-ch, by camera
Smart Search	By target classification, images by channel, time and event type
Network	
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	60 Mbps
Network Protocols	HTTP; HTTPS; TCP/IP; IPv4 / IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS
Network Interface	1 x RJ-45 10/100 Mbps self-adaptive Ethernet interface
PoE Interface	4 x RJ-45 10/100 Mbps self-adaptive Ethernet interface
PoE Standard	IEEE 802.3 af/at
Mobile Phone Access	Pro-X
Auxiliary Interfaces	
SATA	1 x SATA
Capacity	Up to 10 TB per hard disk
USB	Front panel: 1 x USB 2.0; rear panel: 1 x USB 2.0
General	
Power Supply	48, 53 VDC, 1.25 A / 1.13 A
Power Consumption	< 10 W (HDD not included,) Total output power of PoE is 36 W, the maximum output power of a single port is 25.5 W
Operating Temperature	14° to 131° F (-10° to 55° C)
Operating Humidity	10% to 93%
Dimensions (W × L × H)	10.24 × 9.18 × 1.72" (260.0 × 233.2 × 43.7 mm)
Weight	4.08 lb (1.85 kg), without HDD
Certifications	FCC: Part 15 Subpart B

Dimensions (mm [inch])

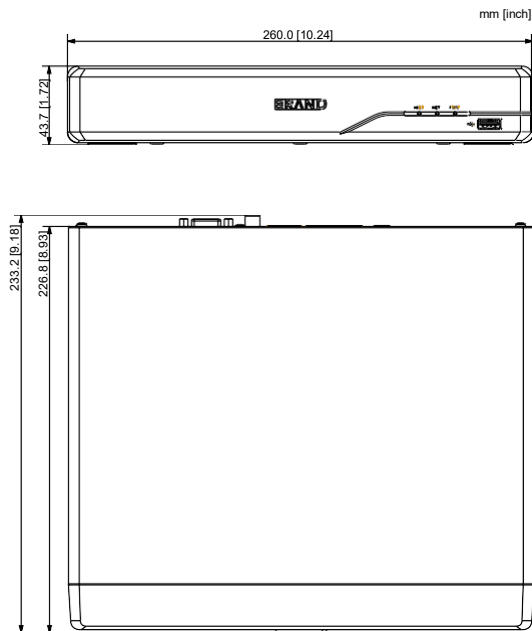

Physical Interface

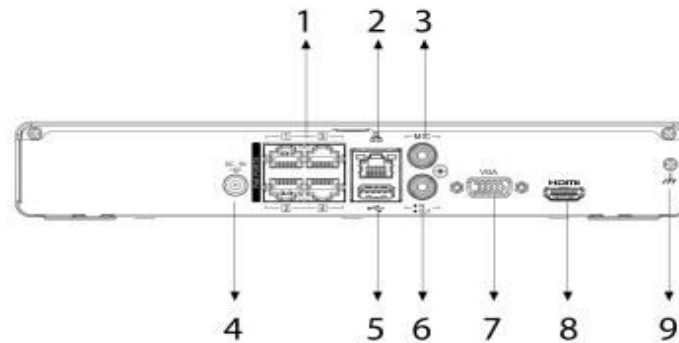

No.	Description	No.	Description
1	PoE Ports	6	Audio out, RCA Connector
2	LAN Network Port	7	VGA Port
3	Audio in, RCA Connector	8	HDMI Port
4	Power Supply	9	Ground
5	USB Ports		